



duraflo[®] INSTALLATION GUIDE

For New Construction


Installation of Duraflo[®] WeatherPRO[®] PROTurbo should comply with all local standards and regulations. Before beginning a job, determine how much ventilation is required in both soffit and roof vents and what sizes of vent would best suit the job. If required, refer to Duraflo[®] Ventilation Calculator for guidance.

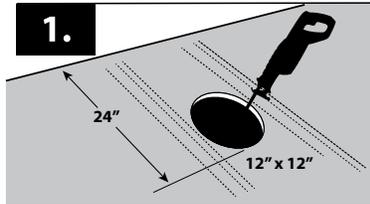


1. Apply underlayment on the sheathing and in the center of the rafters cut a 12" round hole. The edge of the hole should be at least 12" and no more than 24" from the roof peak.

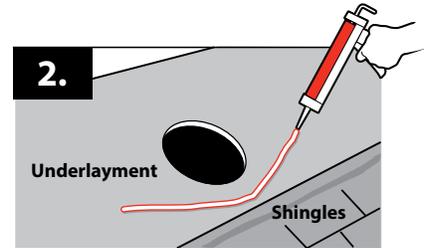

2. Using a 1/2 inch bead, apply a generous amount of construction sealant to the underlayment in front of hole before applying next shingle course.

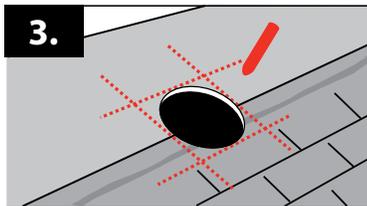


3. Install next shingle course over sealant bead and mark extended chalk lines to help position vent over opening in next step.

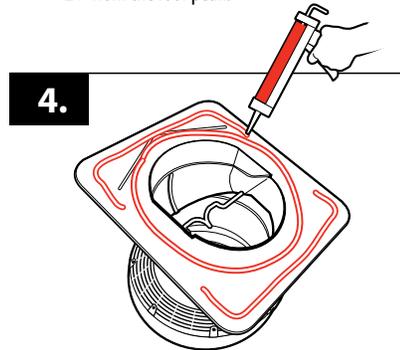


4. Using a 1/2 inch bead, apply a generous amount of construction sealant to the base of the vent.

Note: Use non-petroleum based sealants only. The use of petroleum based sealants may void any manufacturer's product warranty.

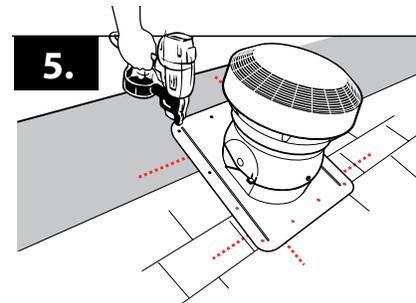


5. Position the roof vent over the cut opening in the roof. Center the vent by aligning edges of the vent throat with the chalk lines previously marked. Using the molded nail indicators, nail the top half of the vent securely into place.

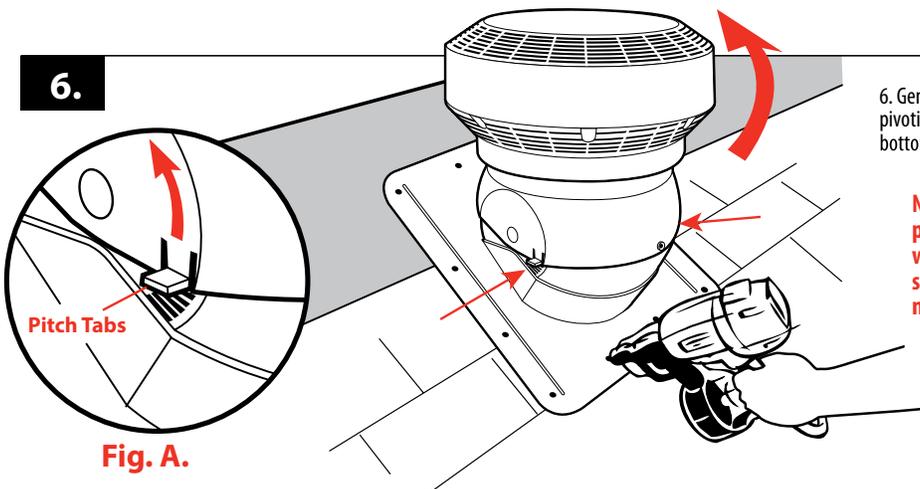


6. Gently lift the pitch calculating tabs (Fig A.), pivoting the top of the unit up to and nail the bottom half of the flange.

Note: For added protection against weather infiltration seal any exposed nail heads.

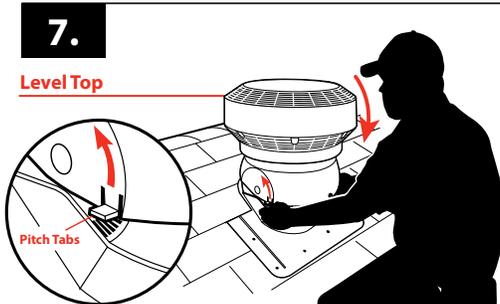

Level Top

7. Using the pitch tabs pivot the top of the unit to desired pitch. **Ensure the top of the unit is level.**

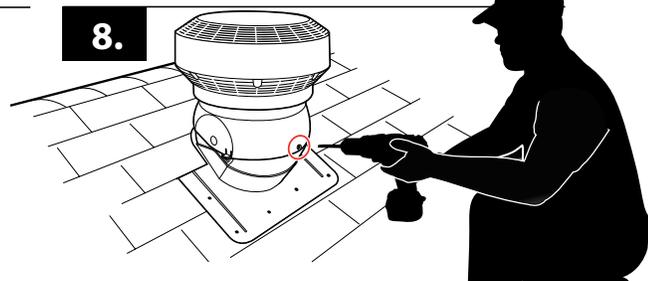

8. Using the molded in screw guide in front of vent, secure vent into position as shown with 1 screw supplied.

Canplas Industries Ltd.
500 Veterans Drive, P.O. Box 1800
Barrie, Ontario, Canada L4M 4V3
Tel: (705) 726-3361
Toll Free 1-800-461-5300
Fax: (705) 726-2186

www.duraflo.com

1-800-461-5300 www.duraflo.com duraflo[®]

canplas[®]