The First Truly Low Profile Grease Interceptor

endura®

Lo-PRO

Grease Interceptor

Canplas® is proud to introduce the Endura® Lo-PRO for those tight on-floor grease interceptor applications where space is at a premium.

Based on the same dimensional footprint as our successful 35gpm and 50gpm Endura® models, this latest 25gpm addition has an overall height of just 11 inches, and still meets the requirements of ASME112.14.3.

More importantly however the internal components can be removed in less than 5" of additional clearance making this unit a truly low profile solution.

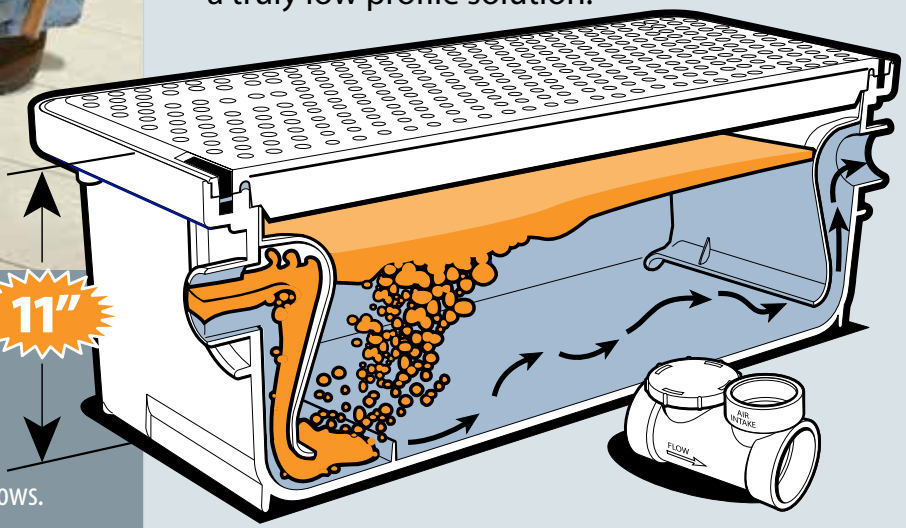

Sewer authorities and building owners spend millions of dollars every year combating grease accumulation in plumbing systems.

Grease accumulation causes sewer blockages and overflows. These overflows are a health risk to you, your employees, your customers and the general public. Injection molded in engineered thermoplastic, the Endura® Grease Interceptor provides restaurant operators the best value and performance on the market today.

ASME 112.14.3

MEA 160-08-E

www.**endura**interceptor.com

NORTH AMERICAN MADE

endura®
GREASE MANAGEMENT

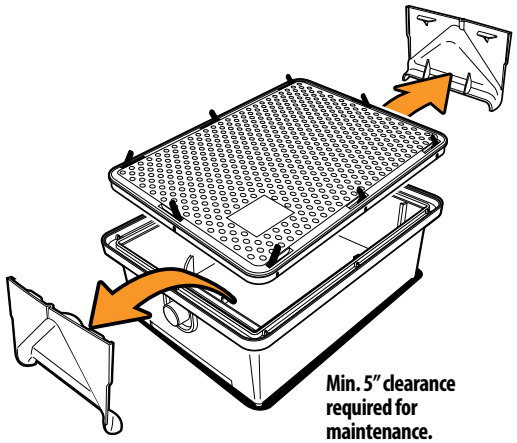

endura® Lo-PRO Grease Interceptor

Contractor shall install a Canplas Endura® Lo-PRO Grease Interceptor, Part No. 3925A02LO. An accessible flow control with a rate of 25gpm will also be installed in accordance to manufacturer's instructions. The interceptor will be able to be serviced with a min. of 5" of overhead clearance. The unit shall be comprised of engineered thermoplastics to withstand operational temperatures up to 220°F (104°C) and incorporate a lid with the capability of supporting 300 lbs. (135 Kgs). The unit will be supported by a limited lifetime warranty. The grease interceptor shall be certified to the current version of the PDI-G101 standard and where locally applicable to ASME112.14.3 or have UPC listing. Contractor shall provide mechanical connectors to connect the grease interceptor.

DIMENSIONS

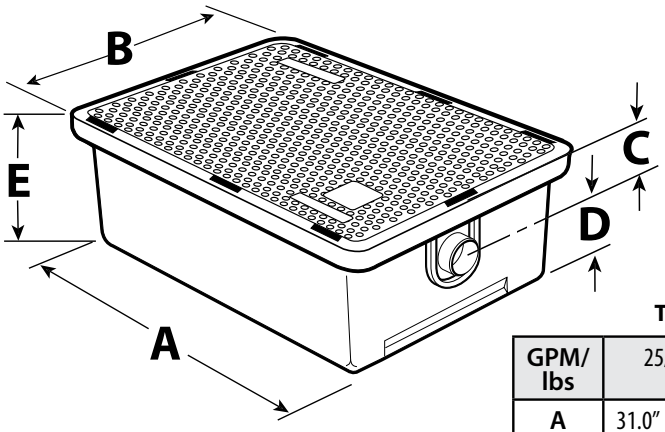

PART #	CTN. QTY.	SIZE
3925A02L0	1	2"

TANK

GPM/ lbs	25/50 LO
A	31.0" (787mm)
B	23.5" (597mm)
C	4" (102mm)
D	7" (178mm)
E	11" (279mm)

FLOW CONTROL





Connection Iron Pipe Size (Solvent weld)	2" h x h
A	3.94" (100 mm)
B	Nom. Dia. 2" (50.8 mm)
C	3.44" (87.4 mm)
D	3" (76 mm)
E	Nom. Dia. 1.5" (38.1 mm)

PART #	CTN. QTY.	SIZE
3922125CA	1	2"

CAPACITY

• Part Number	Endura 25L0 3925A02L0
US Gallons Per Minute - GPM (L/Sec)	25 LO (1.6)
Grease Capacity Min - lb (kg)	50 (22.68)
Grease Capacity Actual (ASME A112.14.3) - lb (kg)	62.59 (28.39)
Average Efficiency % (ASME A112.14.3)	96.3%
Operating Temperature Capabilities	220°F (104°C)
Cover Load Rating- CSA B481.0	L 300 lb (135 kg)
Min. Test Load for Approval	L 600 lb (270 kg)
Unit Weight (Empty)	34.35 lb (15.58 kg)
Liquid Capacity	18.9 gal (71.54 L)
Connection size (mechanical joint only)	2"

Components for: Lo-PRO Grease Interceptor

ITEM	Description	Part No
1A	- Latches (left)	#3935A-6LH
1B	- Latches (right)	#3935A-6RH
2	- Reinforced polypropylene cover	#3935A-2
3	- Rubber gasket	#3935A-5
4	- Removable polypropylene baffles	#3925AL0-3
5	- One-piece tank	#3925A02LO-1

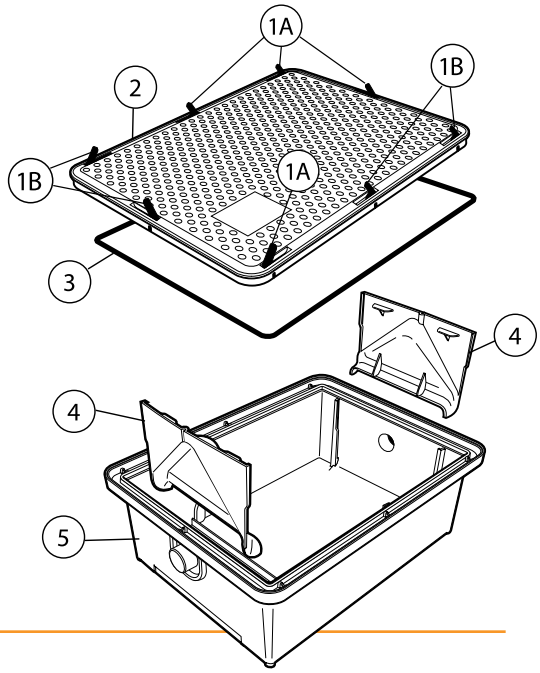

Canplas Industries Ltd.
Separation Technologies Group
500 Veterans Drive, PO Box 1800
Barrie, ON L4M 4V3 Canada

Tel: (705) 726-3361
Toll Free: 1-800-461-5300
Fax: (705) 726-2186

Email: tech-support@enduraInterceptor.com

canplas®

GD-02060-06-21 Endura® is a registered trademark.